



FEED AND BIOFUEL

EXTRUDER

TYPE EX0621

The ANDRITZ single-screw extruder, type EX0621, represents state-of-the-art technology, ensuring unique quality feed at minimum operating costs. The optimized extrusion concept for unmatched performance

consists of controlled feeding of dry ingredients, optimum conditioning with steam and liquid addition, even flow rate to extruder, and high extrusion flexibility and controllability.

ANDRITZ

ENGINEERED SUCCESS

STANDARD FEATURES FOR EX0621 EXTRUDERS

- High capacity of 3-7 TPH
- Low-maintenance and high-performance V-belt transmission
- Main screw drive, AC constant or AC/DC variable speed
- Extruder screw with six barrel/screw segments, of which five are heating/cooling sections
- Tapped screw and barrel design, no bolts/ flanges between barrel heads and no screw shaft splines
- Re-configuration and maintenance with minimum downtime
- All heads with multiple connectors for liquid and steam injection or temperature and pressure measurement
- Hinged die plate assembly for easy die change
- Unique knife arrangement, using throw-away Stanley™ knife blades
- Extruder inlet with bypass to avoid blockage between conditioner and extruder inlet
- Low-cost maintenance and wear parts
- Modular design with built-in flexibility.


OPTIONS AND ACCESSORIES AVAILABLE

- Single or dual conditioners for optimum retention time and high mixing efficiency
- Flextex on-line control of starch cook and expansion
- ECS expansion control system for on-line control of product density
- Extrusion control system ECMS/ECOS/ECPS

ANDRITZ Feed and Biofuel A/S
 andritz-fb.dk@andritz.com
 p: +45 72 160 300 / andritz.com/ft



All data, information, statements, photographs and graphic illustrations in this leaflet are without any obligation and raise no liabilities to or form part of any sales contracts of ANDRITZ AG or any affiliates for equipment and/or systems referred to herein. © ANDRITZ AG 2021. All rights reserved. No part of this copyrighted work may be reproduced, modified or distributed in any form or by any means, or stored in any database or retrieval system, without the prior written permission of ANDRITZ AG or its affiliates. Due to legal requirements, we must inform you that ANDRITZ AG processes your data for the purposes informing you about the ANDRITZ GROUP and its activities. Find out more details about our data privacy declaration and your rights under the data protection legislation on our website: andritz.com/privacy. ANDRITZ AG, Stattegger Strasse 18, 8045 Graz, Austria.

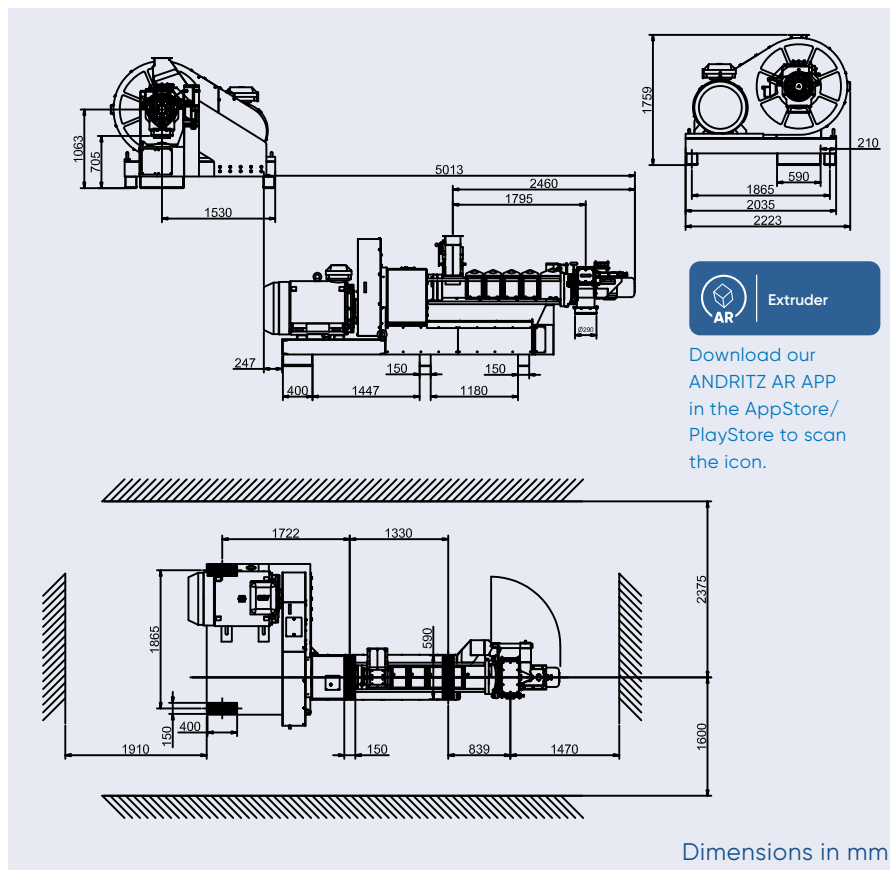

Dimensions in mm

- Local control station
- Liquid dosing with frequency converter-controlled precision pumps.
- Permanent magnet motors can be supplied and directly mounted. That goes for 618, 621, and 1021.

TECHNICAL DATA

Extruder EX0621

Main motor	Constant speed - AC	160 - 315 kW (215 - 422 HP)	50/60 Hz
	Variable speed - AC		
Cutter	Freq. contr. motor	5.5 kW (7 HP)	1500/1800 rpm
Extruder screw			Type EX0621
	Barrel length		1600 mm
	Diameter		210 mm
	Number of heads		6 pcs.
Total weight			8200 kg
Capacity	Dep. on product formulation		3-7 tph

